


PH-20-STA - 2 Litre Boiler Condensate Pump



PH-20-STA

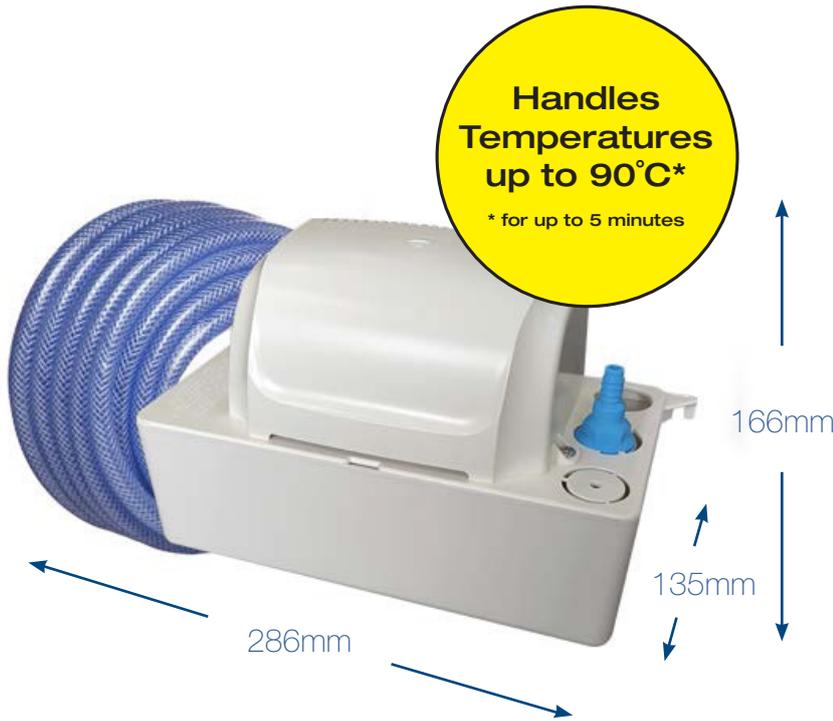


2 Litre

Boiler Condensate Pump

The 5.5 metre discharge lift helps with the flexibility of the installation. Suitable for both floor and wall mounting and comes with a quick release check valve. Suitable for boilers up to 200kW this version comes with 6 metres of 9.5mm (3/8") ID flexible drain hose.

Features

- 650ml drink cycle at 8.5psi
- Typically 30 seconds run time 4-5 times per day
- Outlet 9.5mm (3/8")
- Suitable for 2.8pH boiler condensate
- 6 metres of 9.5mm (3/8") ID flexible hose
- High-level safety switch
- Suitable for boilers up to 200kW

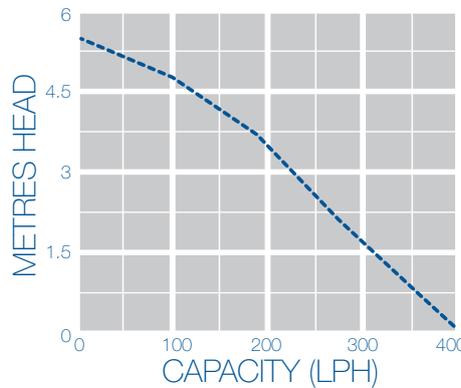

The Package

- 2 Litre Tank Pump
- Quick release 1/4 turn check valve
 - 6m of 9.5mm (3/8") hose
 - 22mm adaptor
 - Hose Clip
 - Installation Instructions



Max. Flow

402 LPH

Tank Cap.

1.8 litres

Decibel Rating

43 dB(A)

Part Code	Max. Lift	Discharge Size	PSI	Watts	IP	Amps	Volts	Hz
PH-20-STA	5.5m	9.5mm (3/8")	8.5	117 W	20	1.6 A	240 V	50 Hz
High Level Alarm	Inlet Height	Weight	Cable Length	Drink Cycle	On Level	Off Level	Reserve Before Overflow	Alarm Level
Volt Free	82.5mm	1.93kg	1.8m	650ml	30mm	9mm	580ml	50mm

The Pump House sales team are available to answer your questions or queries on this product. Our experts are waiting for your call **0115 900 5858** or if you prefer send an email to sales@pumph.co.uk or visit www.pumph.co.uk



Pumps & Boiler Condensate Accessories

Struggling to route T&P?

High Temperature & Pressure Relief

5 litre tank pump can handle high temperatures up to 100 degrees and high flow rates. Ideal for unvented cylinder T&P discharge.



PH-5L-HW

Struggling to route PRV?

PRV & Condensate

The high temperature pump specifically designed to take PRV and condensate from boilers. It needs EN standards and can handle temperatures up to 110 degrees. It comes with 10 metres 'no sag' high grade braided hose.



PH-3.8L-HW

NEW Pre-Slit Weatherproof Insulation

Step One



Open the pre-slit insulation

Step Two



Wrap around the pipe, peel away yellow cover and seal together. Use the adhesive flap to secure.

Step Three



Condensate pipework is now fully protected with NEW pre-slit weatherproof insulation



Meets
BS 6798:2014
Boiler Installation
requirements

FH-I-100-35-SLIT

Boiler Buoy Bypass Valve

A simple & safe bypass valve which indicates when there is a blockage caused by frozen condensate. The built in tap allows the condensate to be drained away safely to keep the heating running. Use the Boiler Buoy Condensate Bypass Valve.



BB-1

Condensate Soakaway

Where a suitable gravity drain point is not available, the soak away should be used in conjunction with 25kg 10mm lime chippings.

Compatible with the following 22mm / 32mm and 40mm pipes.



SOAK1

Plastic Pipe Clamp Kit

These pipe clamps are designed to connect overflow or waste pipe to an existing 32mm (1-1/4") or 40mm (1-1/2") pipe.



PP-CL-21.5-W-32-40