











CONDENSATE REMOVAL PUMP

The world's no.1 mini pump becomes the quietest in its class! Featuring an acoustic damper, anti vibration tubing & bracket, the Silent+ Mini Orange is whisper quiet.



12L/h max. flow



10m max. rec. head (flow rate 6L/h)



19dB(A)

KEY FEATURES


- Quietest in its class
- Submersible secondary reservoir included
- Plug & play


SUITABILITY







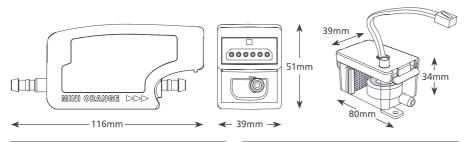



SILENT* MINI ORANGE SPECIFICATIONS	
12L/h @ 0 head	
10m	
2m	
19dB(A)	
230 VAC, 0.11A, 16W 50/60Hz	
Non continuous	
II appliance \Box	
16kW / 54,000Btu/h	
40°C / 104°F	
6mm ID	
IP21	
3.0A Normally closed	
✓	
✓	

SILENT+ MINI ORANGE OPTIONS

Silent+ Mini Orange ED2212

Silent' Mini Orange	FP3313
† Pump only	
SUGGESTED XTRA ACCESSORIES	
Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 1/4" (6mm)	AX5100
Inline Filter 16mm	FP2640

4.3m mini/maxi orange extension kit



sales@aspenpumps.com

For more installation accessories take a look at our Aspen Xtra range

IN THE BOX

Silent⁺ Mini Orange pump • 1.5m Plug & play power cable • Acoustic damper and 1m orange discharge tube with connector • Anti vibration bracket • Reservoir • Reservoir lid with 1.5m sensor cable • Submersible reservoir • Anti siphon device • Float & filter • 1.5m Suction tube 6mm ID • 220mm Orange inlet hose 14mm ID • 150mm Vinyl breather tube 6mm ID • Drain connector kit • Fixing kit • Install manual

Download manual at aspenpumps.com

View install video at aspenpumps.com

Information correct at time of going to press.



Self priming







+44 (0)1323 848842

