


# PH-5L-HW - High Temperature & Pressure Relief Pump



## PH-5L-HW

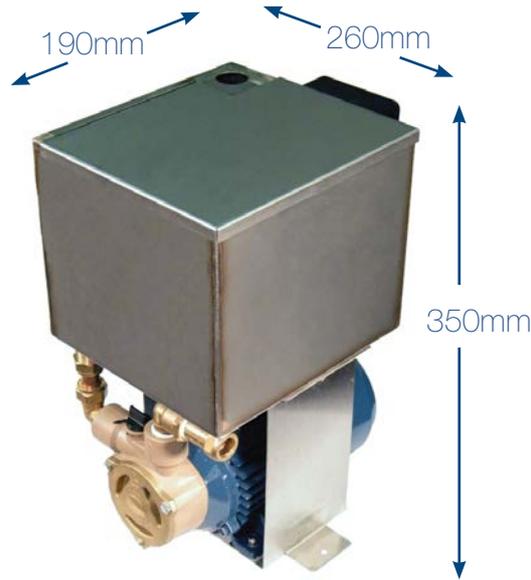


## High Temperature & Pressure Relief Pump

### ‘Granville’ The heavy duty giant!

Manufactured in the UK this heavy duty, high temperature tank pump incorporates thermal overload protection and high level alarm switch. Ideal unvented cylinder T&P discharge and steam humidifiers. Having one of the largest discharge rates of 32 litres per minute this pump can handle both high temperature up to 100 degrees and high flow rates.

### Features

- High-level safety switch
- Max. flow 1920 LPH / 32 LPM
- Max. head 20m
- Max. head for unvented cylinders 8m
- Working discharge lift 8m
- Discharge rate volume 32 LPM
- 15mm copper outlet
- 25mm inlet
- 15mm non-return valve

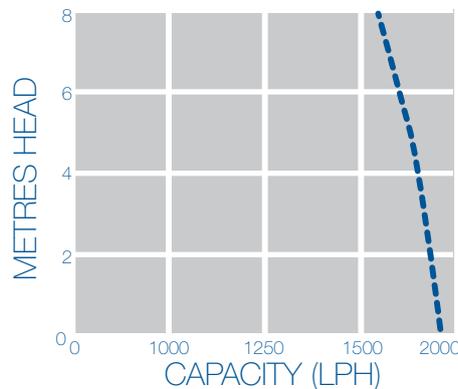

#### Max. Flow

1920 LPH / 32 LPM



#### Tank Cap.

5 litres

### The Package

- 5 Litre Stainless Steel Tank Pump
- Brass Non return Valve

### Related Products

Trunking

PVC Coated Insulation

Part Code	Max. Lift	Discharge Size	PSI	Watts	Temperature	Amps	Volts	Hz
PH-5L-HW	8m / 20m	15mm	52	370W	100°C	2.4A	240 V	50 Hz
High Level Alarm	Inlet Height	Weight	On Level	Off Level	Outlet	Inlet		
Volt Free	350mm	7kg	252mm	197mm	15mm	25mm		

The Pump House sales team are available to answer your questions or queries on this product. Our experts are waiting for your call **+44 (0)115 900 5858** or if you prefer send an email to **sales@pumph.co.uk** or visit **www.pumph.co.uk**

