

WGP Pumps

Flow rates up to 14,800
litres per hour



Powerful Multi-Purpose Pond Pumps

Powerful, premium quality dual-discharge submersible pumps for garden and Koi ponds are available in four sizes ranging from 4,000 to 14,800 litres per hour maximum flow rate. The four models can lift water 5.5 to 8.1 metres maximum. The pumps are economical to operate and environmentally safe to use. The motor housing design provides a water jacket around the motor casing keeping it cooled which extends life of motor. A unique impeller/seal design keeps debris away from the shaft seal preventing wear, which also helps to prolong the life of the pump.

The WGP pumps can operate continuously, circulating water through filtration equipment, or powering decorative water features such as a waterfall, fountain or cascade. Each model includes two outlets allowing one pump to operate two water features simultaneously. The included removable base stabilizes the pump on the pond bottom when used in the horizontal position and provides a convenient handle. A snap-off inlet cover provides easy access to the pump for cleaning.

Features

- 10 Metre Cable
 - Electrical connections are made away from water's edge
- Removable Handle/Base
 - Easy to carry or lift out of water and perfect for positioning in pond
- Polymer outer case, stainless steel motor case
 - Completely corrosive resistant construction
- Dual 1-1/4" BSP outlet design
 - It's like having two pumps in one (one outlet is fitted with a removable plug)
- 90° adapter for 1" hose
 - Included
- Side or top outlet
 - Ideal for attaching fountain jet directly to top pump outlet or attaching hose to side pump outlet
- Ceramic shaft seal sleeve
 - Provides durable sealing surface preventing shaft wear and keeps water out of motor area
- Removable pump inlet cover
 - Allows easy cleaning of impeller chamber
- 5/16" inlet
 - Allows up to 3/8" solids to pass through the pump
- 2 year warranty
- IP68
- CE
- TUV/GS approved
- Cable: 10 m
- 1" 90° hose adapter
- 1-1/4" BSP plug (used when second outlet is not used)


LittleGIANT®

WGP Pumps


Submersible water pumps for Koi and garden ponds

High capacity submersible pumps are safe for use in Koi or garden ponds. All pumps are fitted with 10m H07 cable and include a 90° outlet adapter for 1" hose, a removable base/handle, two outlets (can be used simultaneously or either outlet can be used alone). Pumps can be placed in the pond either horizontally or vertically.

230V, 50Hz

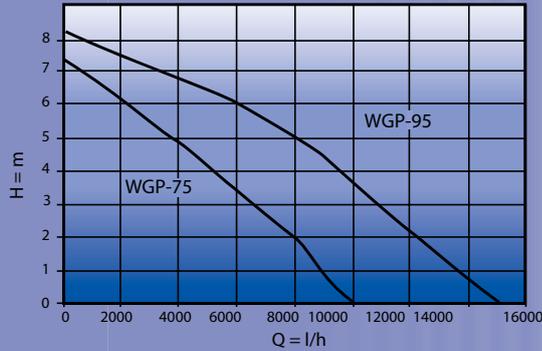

230V, 50Hz

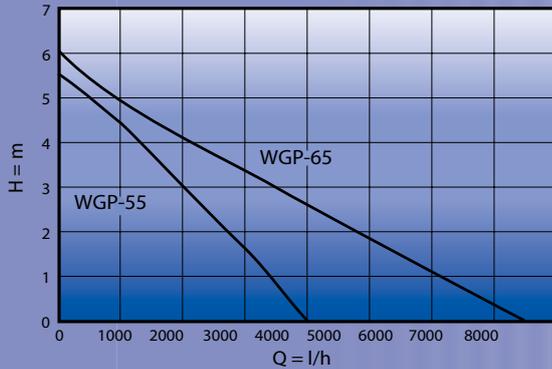

Dual Outlet Design

It's like having two pumps in one (one outlet plug and one 90° 1-1/4" hose adapter included)

Side or Top Outlet

Ideal for attaching fountain jet directly to top pump outlet or attaching outlet hose to side pump outlet



Specifications

Model No.	Item No.	Max Flow (1/hr)	Max Flow at			Max Head (m)	Watts	Amps	Weight (kg)	Outlet x 2	Dimensions (H x L x W)	Enclosure Rating
			1 metre (l/h)	3 metre (l/h)	6 metre (l/h)							
WGP-55	507256	4000	3420	2080	—	5.5	220 W	1.0	4.1	1-1/4" BSP	206mm x 243mm x 161.3mm	IP68
WGP-65	507265	7600	7200	3785	200	6.1	270 W	1.15	4.1	1-1/4" BSP	206mm x 243mm x 161.3mm	IP68
WGP-65-FS	507268	7600	7200	3785	200	6.1	270 W	1.15	4.1	1-1/4" BSP	206mm x 243mm x 161.3mm	IP68
WGP-75	507276	10000	9400	6850	2150	7.3	370 W	1.7	5	1-1/4" BSP	206mm x 243mm x 161.3mm	IP68
WGP-95	507295	14800	13630	10978	6000	8.1	700 W	3.3	6.4	1-1/4" BSP	206mm x 279mm x 161.3mm	IP68
WGP95-FS	507298	14800	13630	10978	6000	8.1	700 W	3.3	6.4	1-1/4" BSP	206mm x 279mm x 161.3mm	IP68



Franklin Electric

P.O. Box 12010
Oklahoma City, OK 73157-2010
Phone: +1.800.701-7894
Fax: +1.405.228.1588
www.LittleGiantPump.com

©2007 Franklin Electric Co., Inc. Little Giant® is a registered trademark of Franklin Electric Co., Inc. Form 996850 10/07

LittleGIANT®